




**Aluminium Connectors**

Acc. DIN 46267 part2

Material :AL. 99.5%  
 (Alloy 1050)

Surface : Bright

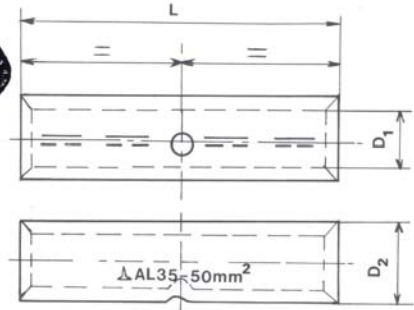

| Cond. Sec. mm <sup>2</sup> | code No. EMCC. | φ Crimp. Die | DIMENSIONS in mm |    |     | Mech. 5mm crimp. Die | hyd. crimp. Die | Net Wt. For 100 pc. (Kg) | No. of pcs. per box | Box gross wt. Kg |
|----------------------------|----------------|--------------|------------------|----|-----|----------------------|-----------------|--------------------------|---------------------|------------------|
|                            |                |              | D1               | D2 | L   |                      |                 |                          |                     |                  |
| 16                         | A16            | 12           | 5.5              | 12 | 55  | 3-3                  | **              | 1.167                    | 1000                | 12.3             |
| 25                         | A25            | 12           | 6.8              | 12 | 70  | 4-4                  | 2-2             | 1.400                    | 700                 | 10.6             |
| 35                         | A35            | 14           | 8.0              | 14 | 85  | 5-5                  | 2-2             | 2.335                    | 500                 | 12.4             |
| 50                         | A50            | 16           | 9.8              | 16 | 85  | 5-5                  | 2-2             | 2.857                    | 395                 | 12.0             |
| 70                         | A70            | 18           | 11.2             | 18 | 105 | 6-6                  | 3-3             | 4.666                    | 235                 | 11.6             |
| 95                         | A95            | 22           | 13.2             | 22 | 105 | 6-6                  | 3-3             | 7.200                    | 155                 | 11.8             |
| 120                        | A120           | 22           | 14.7             | 22 | 105 | 6-6                  | 3-3             | 6.375                    | 145                 | 10.0             |
| 150                        | A150           | 25           | 16.3             | 25 | 125 | 6-6                  | 3-3             | 9.500                    | 105                 | 10.7             |
| 185                        | A185           | 28           | 18.3             | 28 | 125 | 6-6                  | 3-3             | 11.800                   | 95                  | 11.9             |
| 240                        | A240           | 32           | 21.0             | 32 | 145 | 8-8                  | 3-3             | 18.330                   | 50                  | 9.8              |
| 300                        | A300           | 34           | 23.3             | 34 | 145 | 8-8                  | 3-3             | 21.250                   | 50                  | 10.2             |
| 400                        | A400           | 38           | 26.0             | 38 | 210 | **                   | 5-5             | 33.300                   | 30                  | 11.0             |
| 500                        | A500           | 44           | 29.0             | 44 | 210 | **                   | 5-5             | 49.000                   | 20                  | 10.5             |