




**Tubular Copper Compression**  
**Cable - Lugs DIN 46235**  
**Material : SE. Copper -**  
**Oxygen Free.**  
**Surface : Tin Plated**

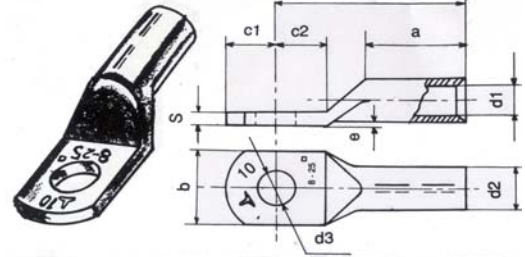

Cond. Sec. mm <sup>2</sup>	code No. EMCL.	φ Bolt	φ Crimp. Die	DIMENSIONS in mm										Mech. 5mm crimp. Die	hyd. crimp. Die	Net Wt. For 100 pc.	No. of pcs. per box	Box gross wt. Kg
				a	b	C1	C2	d1	d2	d3	L+2	S	e+0.5					
6	C6/6	M 6	5	10	8.5	9	8.5	3.8	5.5	6.4	24	1.5	0.6	2		0.30	4000	12.7
10	C10/6	M 6	6	10	9.0	9	9.0	4.5	6.0	6.4	27	1.5	0.6	2		0.36	4000	15.1
16	C16/6	M 6	8	20	13.0	10	10.0	5.5	8.5	6.4	36	2.5	1.0	2	1	1.25	2000	26.7
	C16/8	M 8	8	20	13.0	10	10.0	5.5	8.5	8.4	36	2.5	1.0	2	1	1.18	2000	24.3
25	C25/6	M 6	10	20	14.0	10	10.0	7.0	10.0	6.4	38	3.0	1.0	2	1	1.49	1600	24.5
	C25/8	M 8	10	20	14.5	10	10.0	7.0	10.0	8.4	38	3.0	1.0	2	1	1.57	1600	25.8
	C25/10	M 10	10	20	16.5	12	12.0	7.0	10.0	10.5	38	3.0	1.0	2	1	1.58	1600	26.0
35	C35/8	M 8	12	20	17.0	10	10.0	8.2	12.5	8.4	42	2.5	1.0	2	1	2.75	1000	28.2
	C35/10	M 10	12	20	19.0	12	12.0	8.2	12.5	10.5	42	2.5	1.0	2	1	2.85	1000	29.2
	C35/12	M 12	12	20	20.5	13	13.0	8.2	12.5	13.0	42	2.5	1.0	2	1	2.80	1000	28.7
50	C50/10	M 10	14	28	21.0	12	12.0	10.0	14.5	10.5	52	4.0	1.0	3	2	4.50	600	21.1
	C50/12	M 12	14	28	21.0	13	13.0	10.0	14.5	13.0	52	4.0	1.0	3	2	4.45	600	27.4
70	C70/10	M 10	16	28	24.0	12	12.0	11.5	16.5	10.5	55	4.5	2.0	3	2	6.15	500	31.5
	C70/12	M 12	16	28	24.0	13	13.0	11.5	16.5	13.0	55	4.5	2.0	3	2	5.90	500	30.2
95	C95/10	M 10	18	35	28.0	12	12.0	13.5	19.0	10.5	65	5.0	2.0	4	2	9.15	330	30.9
	C95/12	M 12	18	35	28.0	13	13.0	13.5	19.0	13.0	65	5.0	2.0	4	2	9.00	330	30.4
120	C120/10	M 10	20	35	30.0	15	16.0	15.5	21.0	10.5	70	5.5	2.0	4	2	11.40	220	25.8
	C120/12	M 12	20	35	30.0	16	17.0	15.5	21.0	13.0	70	5.5	2.0	4	2	11.40	220	25.8
	C120/16	M 16	20	35	32.0	19	20.0	15.5	21.0	17.0	70	5.5	2.0	4	2	11.30	220	25.6
150	C150/12	M 12	22	35	34.0	16	17.0	17.0	23.5	13.0	78	6.0	2.0	4	2	16.30	180	30.1
	C150/16	M 16	22	35	34.0	19	20.0	17.0	23.5	17.0	78	6.0	2.0	4	2	16.20	180	29.9
185	C185/12	M 12	25	40	37.0	16	17.0	19.0	25.5	13.0	82	6.0	2.0	5	2	18.90	160	31.0
	C185/16	M 16	25	40	37.0	19	20.0	19.0	25.5	17.0	82	6.0	2.0	5	2	18.90	160	31.0
240	C240/12	M 12	28	40	42.0	16	17.0	21.5	29.0	13.0	92	6.5	2.0		2	27.30	100	28.0
	C240/16	M 16	28	40	42.0	19	20.0	21.5	29.0	17.0	92	6.5	2.0		2	27.30	100	28.0
300	C300/12	M 12	32	50	48.0	16	19.0	24.5	32.0	13.0	100	7.0	2.0		2	33.20	85	29.0
	C300/16	M 16	32	50	48.0	19	22.0	24.5	32.0	17.0	100	7.0	2.0		2	33.50	85	29.1
400	C400/20	M 20	38	70	55.0	25	25.0	27.5	38.5	21.0	115	10.0	3.0		2	65.40	40	26.8
500	C500/20	M 20	42	70	60.0	25	25.0	31.0	42.0	21.0	125	10.0	3.0		3	82.00	35	29.4
625	C625/20	M 20	44	80	60.0	25	25.0	34.5	44.0	21.0	135	10.0	3.0		3	78.70	30	25.0

For Non - Standard bolt Sizes, Min Order quantity is 2000pcs.