




Tubular Copper
Cable Connectors

Acc. DIN 46267 part1
 Material :SE. Copper -
 Oxygen Free
 Surface : Tin Plated

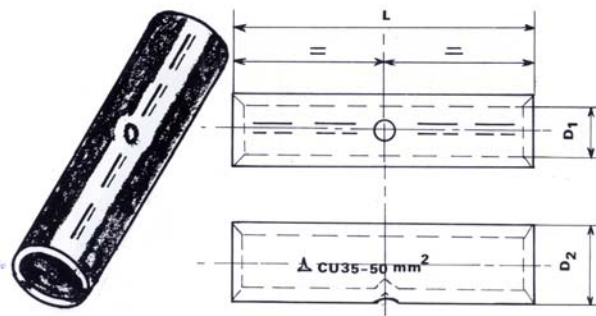

| Cond. Sec. mm ² | code No. EMCC. | φ Crimp. Die | DIMENSIONS in mm | | | Mech. 5mm crimp. Die | hyd. crimp. Die | Net Wt. For 100 pc. (Kg) | No. of pcs. per box | Box gross wt. Kg |
|-------------------------------|--------------------------|--------------------|------------------|------|-----|----------------------------|-----------------------|-----------------------------------|---------------------------|------------------------|
| | | | D1 | D2 | L | | | | | |
| 6 | C6 | 5 | 3.8 | 5.5 | 30 | 1-1 | ** | 0.360 | 4800 | 17.8 |
| 10 | C10 | 6 | 4.5 | 6 | 30 | 1-1 | ** | 0.327 | 4000 | 13.9 |
| 16 | C16 | 8 | 5.5 | 8.5 | 50 | 2-2 | 1-1 | 1.430 | 2400 | 29.3 |
| 25 | C25 | 10 | 7.0 | 10 | 50 | 2-2 | 1-1 | 1.795 | 1600 | 29.7 |
| 35 | C35 | 12 | 8.2 | 12.5 | 50 | 2-2 | 1-1 | 3.070 | 1000 | 31.4 |
| 50 | C50 | 14 | 10.0 | 14.5 | 56 | 3-3 | 2-2 | 4.200 | 670 | 28.8 |
| 70 | C70 | 16 | 11.5 | 16.5 | 56 | 3-3 | 2-2 | 5.400 | 500 | 27.7 |
| 95 | C95 | 18 | 13.5 | 19 | 70 | 4-4 | 2-2 | 8.700 | 330 | 29.4 |
| 120 | C120 | 20 | 15.5 | 21 | 70 | 4-4 | 2-2 | 9.860 | 245 | 24.9 |
| 150 | C150 | 22 | 17.0 | 23.5 | 80 | 5-5 | 2-2 | 14.500 | 185 | 27.5 |
| 185 | C185 | 25 | 19.0 | 25.5 | 85 | 5-5 | 2-2 | 17.250 | 160 | 28.3 |
| 240 | C240 | 28 | 21.5 | 29 | 90 | ** | 2-2 | 23.666 | 100 | 24.3 |
| 300 | C300 | 32 | 24.5 | 32 | 100 | ** | 2-2 | 29.333 | 85 | 25.7 |
| 400 | C400 | 38 | 27.5 | 38.5 | 150 | ** | 3-3 | 70.500 | 40 | 30.7 |
| 500 | C500 | 42 | 31.0 | 42 | 160 | ** | 3-3 | 89.000 | 30 | 27.4 |
| 625 | C625 | 44 | 34.5 | 44 | 160 | ** | 3-3 | 81.300 | 20 | 17.0 |